



Actinic BL TL-D(K) Secura

ACTINIC BL15W/10 SECURA 25PK

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data


General Information		UV Depreciation at 2000 h		Operating and Electrical	
Base	G13 [Medium Bi-Pin Fluorescent]	UV Depreciation at 2000 h	25 %	Power (Rated) (Nom)	15 W
Main Application	Insect traps	UV Depreciation at 5000 h	40 %	Lamp Current (Nom)	0.335 A
Life to 50% Failures (Nom)	11000 h			Voltage (Nom)	55 V
Useful Life (Nom)	9000 h				
Light Technical		Approval and Application			
Color Code	10	Mercury (Hg) Content (Nom)	5.5 mg		
Color Designation	Actinic				
Chromaticity Coordinate X (Nom)	222				
Chromaticity Coordinate Y (Nom)	210				

Actinic BL TL-D(K) Secura

UV	
UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	3.15 W
Product Data	
Order product name	Actinic BL TL-D 15W/10 Secura 1SL/25
EAN/UPC - Product	8711500898586

Order code	215186
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928024701029
Net Weight (Piece)	61.000 g


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
Secura 1SL/25					

TL-D 15W/10 SECU

Photometric data

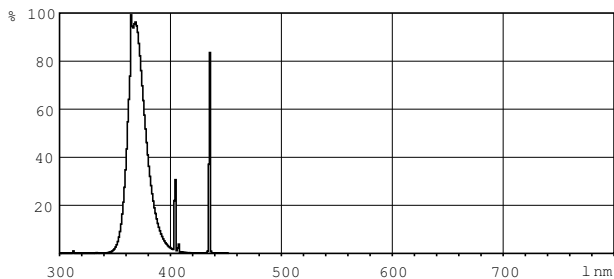

XDPB_XUBTLD_10-Spectral power distribution B/W

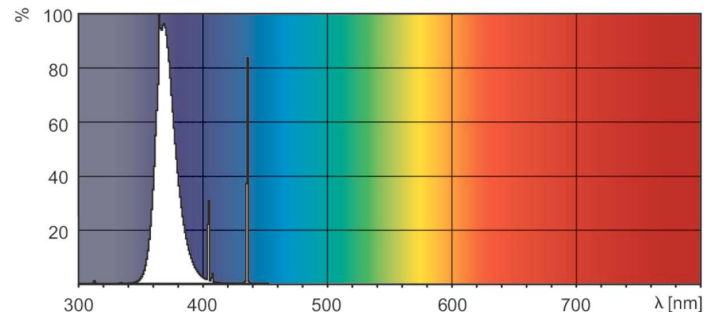

XDPO_XUBTLD_10-Spectral power distribution Colour

