



Actinic BL TL(-K)/TL-D(-K)

F15T8/BL 25PK

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General information	
Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Insect traps
Life to 50% Failures (Nom)	8000 h
Useful Life (Nom)	9000 h
Light technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	222

Chromaticity Coordinate Y (Nom)	210
UV Depreciation at 2000 h	10 %
UV Depreciation at 5000 h	15 %
UV Depreciation at 8000 h	20 %
Operating and electrical	
Power (Rated) (Nom)	15 W
Lamp Current (Nom)	0.34 A
Voltage (Nom)	55 V


Actinic BL TL(-K)/TL-D(-K)

Mechanical and housing	
Bulb Shape	T8 [T8]
Approval and application	
Mercury (Hg) Content (Nom)	5.0 mg
UV	
UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	3.9 W
Product data	
Order product name	Actinic BL TL-D 15W/10 1SL/25

EAN/UPC - Product	8711500710932
Order code	130369
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928024801029
Copy Net Weight (Piece)	0.125 lb




Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10 1SL/25	1-1/8 in	17-1/4 in	17-1/2 in	17-7/16 in	17-13/16 in

Actinic BL TL-D 15W/10 1SL/25

Photometric data

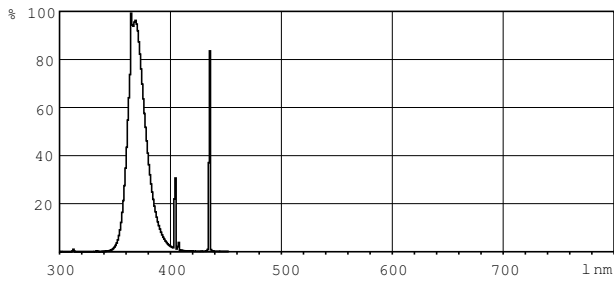

XDPB_XUBTLD_10-Spectral power distribution B/W

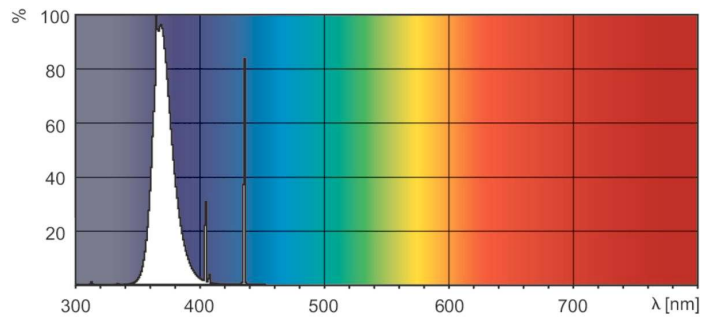

XDPO_XUBTLD_10-Spectral power distribution Colour

Actinic BL TL(-K)/TL-D(-K)

