



MSR Gold™ FastFit

MSR Gold™ 2500/2 FastFit 1CT/4

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ 1200 FastFit can be operated in a lamp wattage range between 800W and 1400W.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data

General information		Operating and electrical	
Base	PGJX50 [PGJX50]	Chromaticity Coordinate X (Nom)	301
Operating Position	Universal [Universal]	Chromaticity Coordinate Y (Nom)	325
Main Application	Entertainment	Correlated Color Temperature (Nom)	7200 K
Life to 50% Failures (Nom)	750 h	Luminous Efficacy (rated) (Nom)	78 lm/W
System Description	FastFit	Color Rendering Index (Nom)	88
Light technical		Power (Rated) (Nom)	2500 W
Color Code	2	Lamp Current (Nom)	19.53 A
Initial lumen (Nom)	195500 lm		

MSR Gold™ FastFit

Ignition Supply Voltage (Min)	198 V
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-Base Information	PGJX50
Luminaire design requirements	
Bulb Temperature (Max)	1742 °F
Pinch Temperature (Max)	932 °F
Pinch Temperature (Max)-DUP(do not use)	932 °F


Product data	
Order product name	MSR Gold™ 2500/2 FastFit 1CT/4
EAN/UPC - Product	8718291221319
Order code	287011
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928106405115
Net Weight (Piece)	0.331 lb

Dimensional drawing

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold™ 2500/2 FastFit 1CT/4	1-7/16 in	3/8 in	2-15/16 in	3 in	3 in	6-1/16 in	2 in

MSR Gold™ 2500/2 FastFit 1CT/4

Photometric data

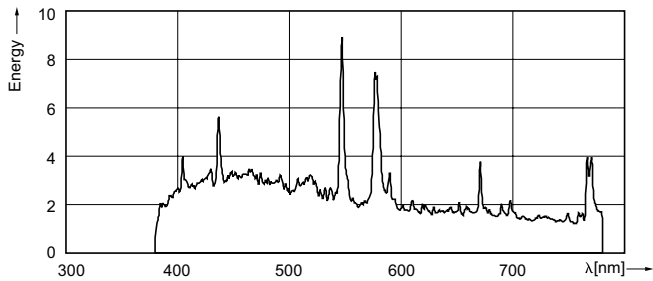

XDPB_XDMSR_2500_2_FastFit-Spectral power distribution B/W

XDPO_XDMSR_2500_2_FastFit-Spectral power distribution Colour

