



LED Highbay

145HB/LED/850/ND WB UDL BB 4/1

Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Available in both plug-and-play (UL Type A) and MainsFit (UL Type B) options, Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.


Product data

General Information	
Base	EX39 [Exclusionary Mogul Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Technical Type	145-400W
Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	120 °
Initial lumen (Nom)	20000 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	131.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	145 W
Lamp Current (Nom)	1450 mA
Wattage Equivalent	400 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V
Temperature	
T-Case Maximum (Nom)	60 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	Others
Product Data	
Order product name	145HB/LED/850/ND WB UDL BB 4/1
EAN/UPC - Product	046677557287
Order code	557280
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002283104
Net Weight (Piece)	1.250 kg

LED Highbay


Dimensional drawing




TForce HB MV ND 180-140W EX39 850 UDL

Product	D	C
145HB/LED/850/ND WB UDL BB 4/1	250 mm	295 mm


Photometric data



LEDTForce 145W Others EX39 120D

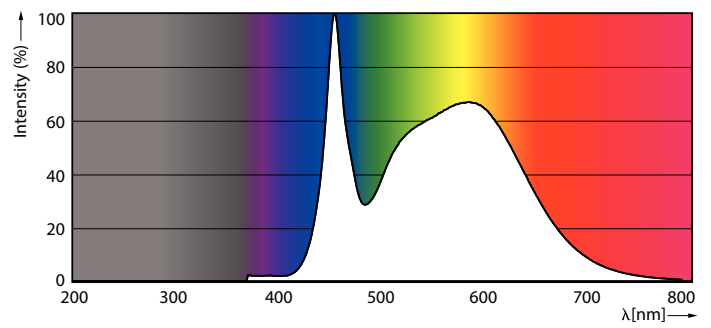

LEDTForce 145W Others EX39 850





General Uniform Lightness Page 11 of 11

LEDTForce 145W Others EX39 850 120D

LED Highbay

Lifetime

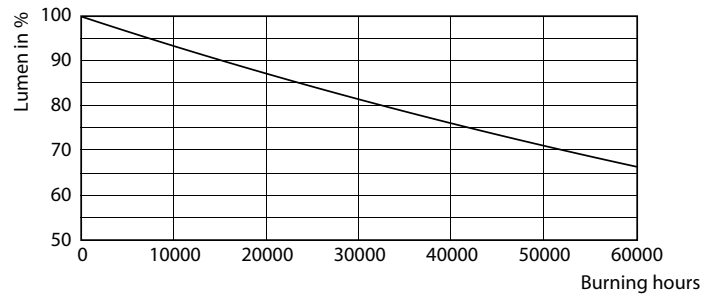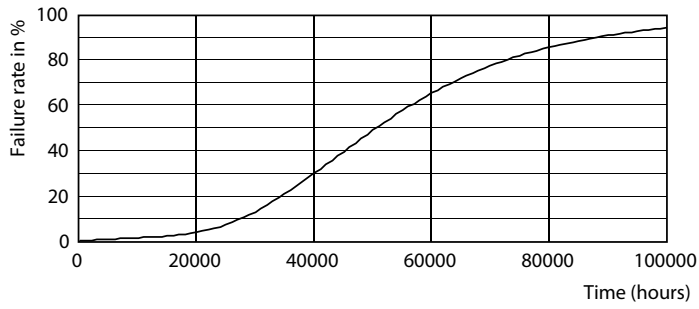

50K

50K

