



LED BR30

15BR30/PER/927-22/E26/WG/HO 4/1FB T20

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.


Product data

General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	15-100W
Light Technical	
Color Code	927-922 [CCT of 2700K-2200K]
Beam Angle (Nom)	110 °
Initial lumen (Nom)	1400 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2700 2200 K
Luminous Efficacy (rated) (Nom)	93.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	15 W
Lamp Current (Nom)	125 mA
Wattage Equivalent	100 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	95 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	BR30
Product Data	
Order product name	15BR30/PER/927-22/E26/WG/HO 4/1FB T20
EAN/UPC - Product	046677558024
Order code	558023
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002351403
Net Weight (Piece)	0.008 kg

LED BR30



Dimensional drawing



BR30 100W WG

Product	D	C
15BR30/PER/927-22/E26/WG/HO 4/1FB T20	94 mm	130 mm


Photometric data



OSRAM Research Ltd. All rights reserved. Page 1/1

LEDbulb BR30 E26 1400lm FR

LEDbulb 15W BR30 E26 927 922 FR

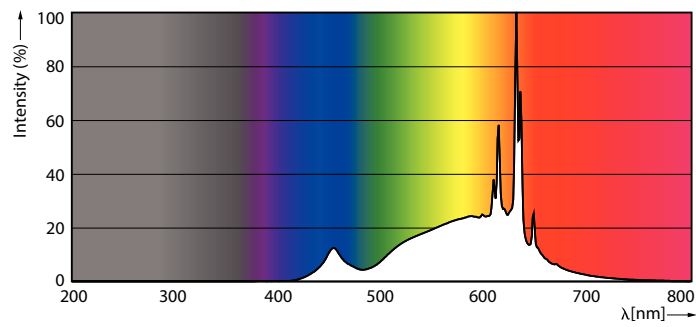

LEDbulb 15W BR30 E26 927 922 FR

LED BR30

Lifetime



15K LED

15K LMP

