



T5

24T5HO/COR/46-840/IF35/G/DIM 25/1

Philips T5 HO LED tubes offer an affordable, energy saving retrofit (Type A) solution. The T5 lamps have been engineered to withstand the test of time with a 50,000-hour lifetime and a limited 5-year limited warranty to back it up. The lighting performance effectively replaces conventional fluorescent T5 HO.

Product data

General information	
Base	G5 [G5]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Light technical	
Color Code	841 [CCT of 4100K (841)]
Beam Angle (Nom)	200 °
Initial lumen (Nom)	3500 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	145.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	24 W
Lamp Current (Max)	1200 mA
Lamp Current (Min)	30 mA
Starting Time (Nom)	0.5 s


Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	TLED_Type A; UL listed HF
Power Factor (Nom)	0.9
Voltage (Nom)	120-277, 347 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	48 in
Bulb Shape	Tube, double-ended
Approval and application	
Energy Saving Product	Yes

T5

Approbation Marks	RoHS compliance UL certificate DLC compliance
Product data	
Order product name	24T5HO/COR/46-840/IF35/G/DIM 25/1
EAN/UPC - Product	046677576738
Order code	576736

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	929003134104
Copy Net Weight (Piece)	0.333 lb



Dimensional drawing

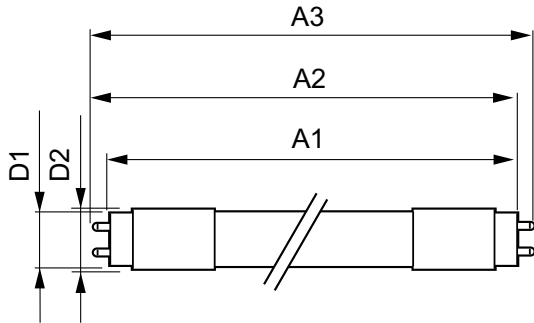

24T5HO/COR/46-840/IF35/G/DIM 25/1


Product	D1	D2	A1	A2	A3
24T5HO/COR/46-840/IF35/G/DIM 25/1	15.3 mm	18.4 mm	1147.8 mm	1154.9 mm	1162 mm

Photometric data

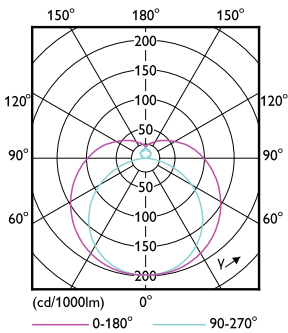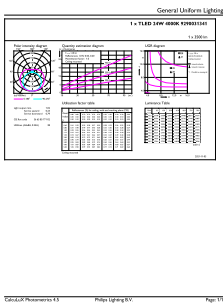



LEDtube COR NAM3 24W G5 3500lm 840-GUL

LEDtube COR NAM3 24W G5 3500lm 1-LDD

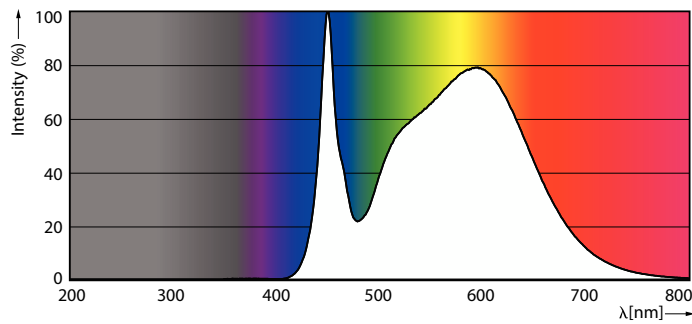


LEDtube COR NAM3 24W G5 3500lm 840-POC


Lifetime

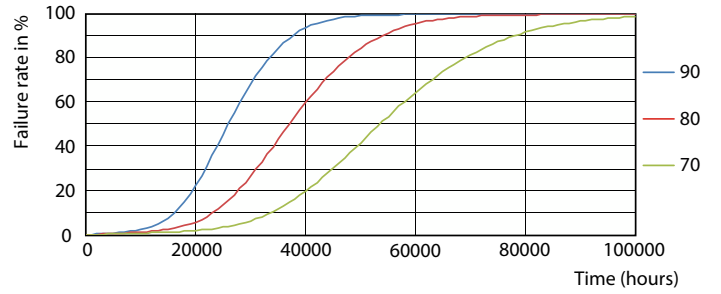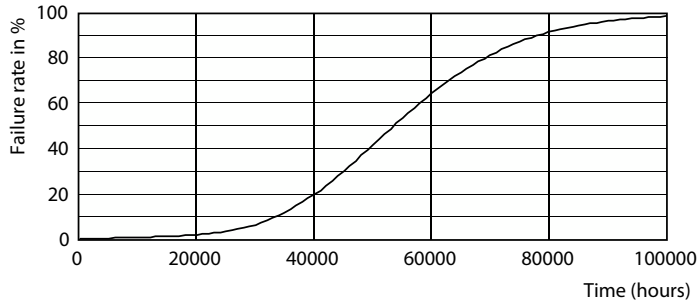


Life Expectancy Diagram

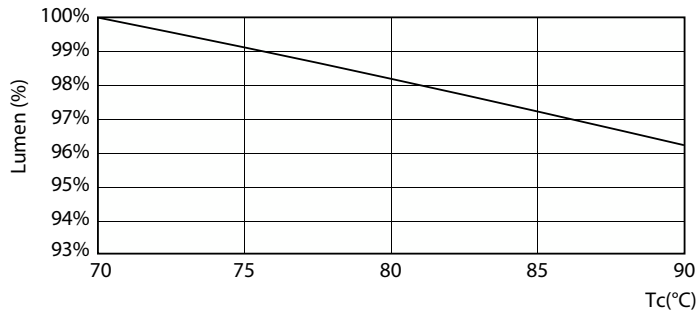

FailureRate

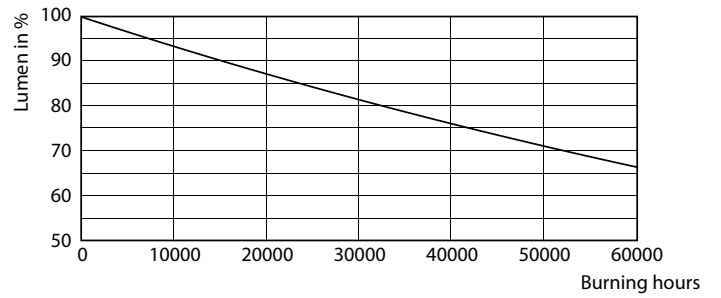

LEDtube COR NAM3 24W 50K LumenVsTc-LMP

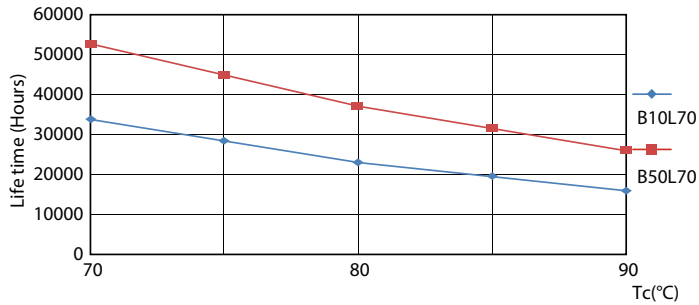

Lumen Maintenance Diagram

LifetimeVsTc

