



Philips most advanced LED replacements for compact fluorescent PL-L lamps with 2G11 base

PL-L

Philips InstantFit LED lamps make the transition to LED from CFL lamps as simple as replacing a lamp. With a wide array of color temperatures, the InstantFit LED lamps can quickly and effectively replace compact fluorescent lamps.

Benefits

- Minimizes overall lighting costs
- Offers cheapest and easiest upgrade to LED lighting technology
- Excellent compatibility with existing fluorescent ballasts

Features

- High energy efficiency, over 40% energy savings
- Long lifetime with superior color and lumen maintenance
- Easy plug-and-play installation. Retrofit replacement of existing CFL-ni lamps
- Conventional form factor fits into existing luminaires
- Durable polycarbonate construction

Application

- Office and general lighting
- Residential and multi-family complexes
- Retail and hospitality


PL-L

Versions



2G11

Dimensional drawing

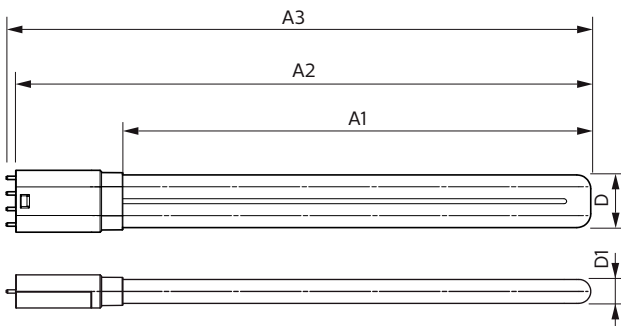

Product	D	D1	A1	A2	A3
16.5PL-L/PER/22/840/IF23/P 4P 10/1	40.6 mm	20 mm	501 mm	564 mm	570.6 mm
16.5PL-L/PER/22/835/IF22/P 4P 10/1	40.6 mm	20 mm	501 mm	564 mm	570.6 mm
16.5PL-L/PER/22/830/IF22/P 4P 10/1	40.6 mm	20 mm	501 mm	564 mm	570.6 mm

Approval and Application

Energy Consumption kWh/1000 h	- kWh
Energy Efficiency Label (EEL)	Not applicable

Controls and Dimming

Dimmable	No
----------	----

Operating and Electrical

Input Frequency	40000-160000 Hz
Voltage (Nom)	70-110 V
Power (Rated) (Nom)	16.5 W
Starting Time (Nom)	0.5 s

General Information

Cap-Base	2G11
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X

Light Technical

Beam Angle (Nom)	160 °
Color Rendering Index (Nom)	82
Llmf At End Of Nominal Lifetime (Nom)	70 %

Mechanical and Housing

Bulb Shape	Tube, single-ended
------------	--------------------

Temperature

T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Case Maximum (Nom)	75 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C

Light Technical

Order Code	Full Product Name	Color Code	Correlated Color		Luminous Flux (Nom)
			Temperature (Nom)		
532895	16.5PL-L/PER/22/830/IF22/P 4P 10/1	830	3000 K		2200 lm
532903	16.5PL-L/PER/22/835/IF22/P 4P 10/1	835	3500 K		2200 lm
532911	16.5PL-L/PER/22/840/IF23/P 4P 10/1	841	4000 K		2300 lm

