



Actinic BL TL(-K)/TL-D(-K)

ACTINIC BL 8W/10 250PK

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data


| General Information | | UV Depreciation at 1000 h | |
|---------------------------------|--------------|---------------------------------|---------|
| Base | G5 [G5] | UV Depreciation at 1000 h | 25 % |
| Main Application | Insect traps | UV Depreciation at 2000 h | 35 % |
| Life to 50% Failures (Nom) | 10000 h | Operating and Electrical | |
| Useful Life (Nom) | 5000 h | Power (Rated) (Nom) | 7.1 W |
| Light Technical | | Lamp Current (Nom) | 0.145 A |
| Color Code | 10 | Voltage (Nom) | 56 V |
| Color Designation | Actinic | Approval and Application | |
| Chromaticity Coordinate X (Nom) | 222 | Mercury (Hg) Content (Nom) | 4.4 mg |
| Chromaticity Coordinate Y (Nom) | 210 | | |
| UV Depreciation at 500 h | 17 % | | |

Actinic BL TL(-K)/TL-D(-K)

| UV | |
|----------------------------|---------------------------------|
| UV-B/UV-A (IEC) | 0.2 % |
| UV-A Radiation 100Hr (IEC) | 1.60 W |
| Product Data | |
| Order product name | Actinic BL TL 8W/10 1FM/10X25CC |
| EAN/UPC - Product | 8711500260420 |

| | |
|---------------------------------|--------------|
| Order code | 215137 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 250 |
| Material Nr. (12NC) | 928001001030 |
| Net Weight (Piece) | 25.300 g |



Dimensional drawing



| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|---------------------------------|---------|----------|----------|---------|----------|
| Actinic BL TL 8W/10 1FM/10X25CC | 16 mm | 288.3 mm | 295.4 mm | 293 mm | 302.5 mm |

TL 8W/10

Photometric data

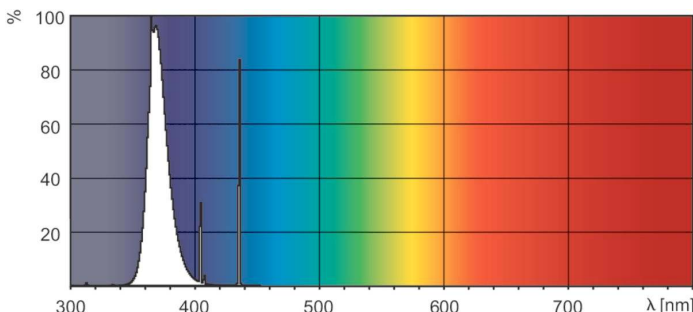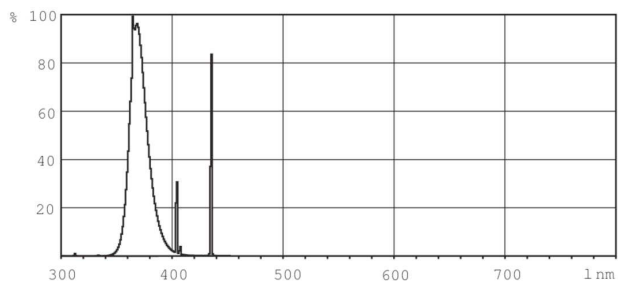

XDPB_XUVATL_10-Spectral power distribution B/W

XDPO_XUVATL_10-Spectral power distribution Colour

