



MSR Gold™ SA Double Ended

MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information		Operating and Electrical	
Base	SFC-11 [SFC-11]	Chromaticity Coordinate Y (Nom)	317
Operating Position	Universal [Universal]	Correlated Color Temperature (Nom)	7500 K
Main Application	Entertainment	Luminous Efficacy (rated) (Nom)	73 lm/W
Life to 50% Failures (Nom)	750 h	Color Rendering Index (Nom)	75
System Description	SA/2 DE		
Light Technical		Power (Rated) (Nom)	575 W
Color Code	2	Lamp Current (Nom)	7 A
Initial lumen (Min)	39000 lm	Ignition Supply Voltage (Min)	198 V
Initial lumen (Nom)	42000 lm		
Chromaticity Coordinate X (Nom)	294		

MSR Gold™ SA Double Ended

Controls and Dimming

Dimmable No

Mechanical and Housing

Cap-Base Information SFC-11

Luminaire Design Requirements

Pinch Temperature (Max) 400 °C

Product Data

Order product name MSR Gold™ 575 SA/2 DE 1CT/40

EAN/UPC - Product 8727900914641

Order code 245019


Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 40

Material Nr. (12NC) 928175105114

Net Weight (Piece) 0.032 kg

Dimensional drawing

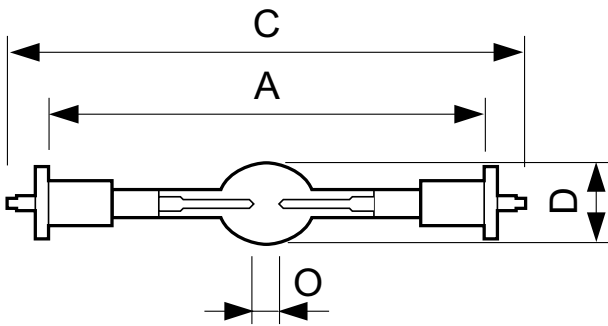


MSR GOLD 575 SA/2 DE


Product	D (max)	O	A (min)	A (max)	A	C (max)
---------	---------	---	---------	---------	---	---------

MSR Gold™ 575 SA/2 DE 1CT/40	18.5 mm	5.0 mm	69.6 mm	70.4 mm	70 mm	92 mm
---------------------------------	---------	--------	---------	---------	-------	-------

Photometric data

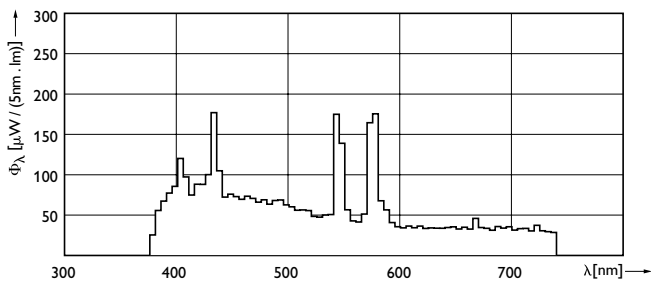

XDPB_XDMSR_575W_SA2-DE-Spectral power distribution B/W

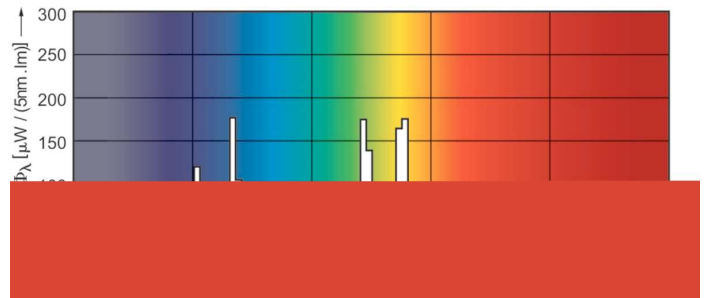

MSR Gold™ SA Double Ended

