



# TrueForce High Lumen PAR

## 25.5PAR30L/PER/830/F25/ND/120-277V 6/1FB

Philips LED TrueForce PAR high lumen lamps are the perfect transition from CDM lamps to LED.

### Product data


General Information		Wattage Equivalent	
Base	E26 [ Single Contact Medium Screw]	Wattage Equivalent	75 W
EU RoHS compliant	Yes	Starting Time (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	Power Factor (Nom)	0.8
Technical Type	25.5-75W	Voltage (Nom)	120-277 V
Light Technical		Temperature	
Color Code	830 [ CCT of 3000K]	T-Case Maximum (Nom)	95 °C
Beam Angle (Nom)	25 °	Controls and Dimming	
Initial lumen (Nom)	2500 lm	Dimmable	No
Luminous Intensity (Nom)	11500 cd	Approval and Application	
Color Designation	White (WH)	Energy Efficiency Label (EEL)	Not applicable
Correlated Color Temperature (Nom)	3000 K	Suitable For Accent Lighting	Yes
Luminous Efficacy (rated) (Nom)	98.00 lm/W	Energy Consumption kWh/1000 h	- kWh
Color Consistency	<4	Product Data	
Color Rendering Index (Nom)	80	Order product name	25.5PAR30L/PER/830/F25/ND/120-277V 6/1FB
LLMF At End Of Nominal Lifetime (Nom)	70 %	EAN/UPC - Product	046677534653
Operating and Electrical		Order code	534651
Input Frequency	50 to 60 Hz		
Power (Rated) (Nom)	25.5 W		

# TrueForce High Lumen PAR

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001917104

Net Weight (Piece)	0.285 kg
--------------------	----------



## Dimensional drawing



PAR30L 27.5-W 2300lm 25D 3000K E26 ND


Product	D	C
25.5PAR30L/PER/830/F25/ND/120-277V 6/1FB	96 mm	119 mm

## Photometric data

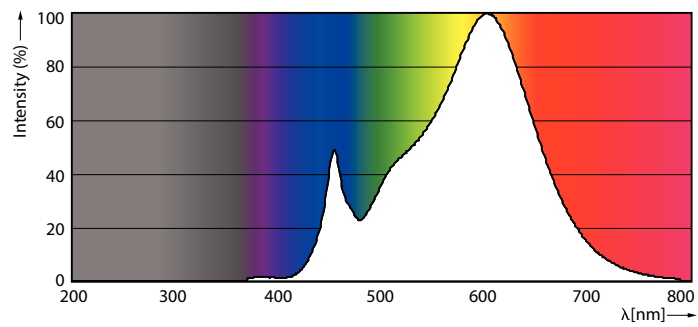

LEDspot PAR30 1FB



LEDspot 25,5 PAR30L 830 F25



LEDspot 25,5 PAR30L 830 F25

# TrueForce High Lumen PAR

## Lifetime

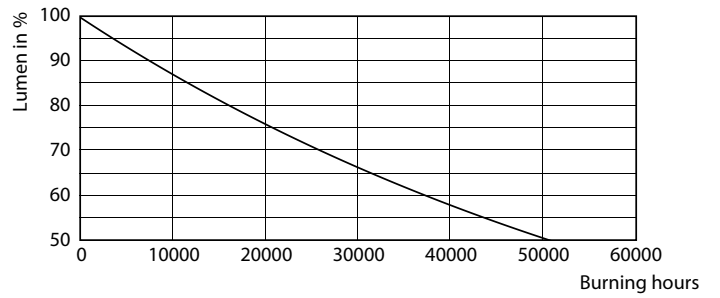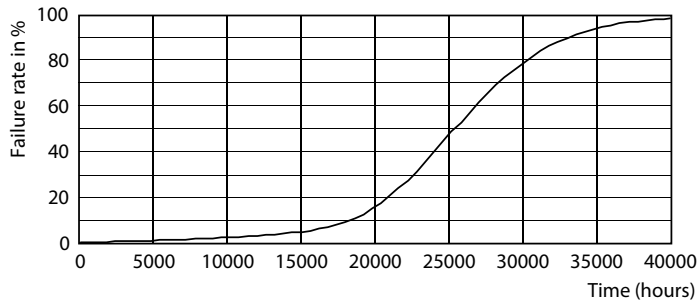

LEDspot PAR30 1FB

LEDspot PAR30 1FB

