



LED PAR30 S/L

9.4PAR30S/COR/930/F40/DIM/120V T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data


General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	9.4-75W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	40 °
Initial lumen (Nom)	850 lm
Luminous Intensity (Nom)	1315 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	9.4 W
Lamp Current (Nom)	90 mA
Wattage Equivalent	75 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	9.4PAR30S/COR/930/F40/DIM/120V T20 6/1FB
EAN/UPC - Product	046677546991
Order code	546993
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002045704

LED PAR30 S/L

Net Weight (Piece) 0.134 kg



Dimensional drawing



JA8 PAR30s 9.4-75W 850lm 40D 3000K E26 D

Product	D	C
9.4PAR30S/COR/930/F40/DIM/120V T20 6/1FB	97 mm	94 mm


Photometric data

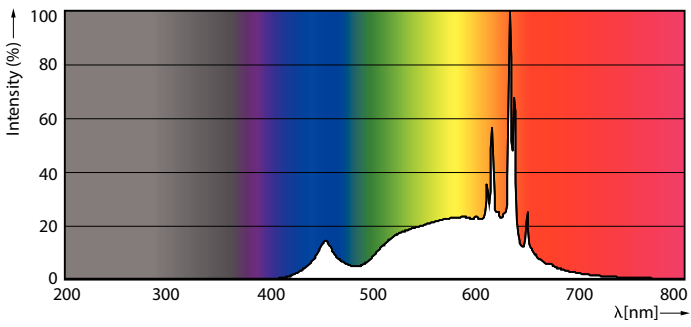

Copyright Accret Lighting Inc. All rights reserved. Page 17

LEDspots 9,4W PAR30S E26 930 40D


LEDspots 9,4W PAR30S E26 930 40D



LEDspots 9,4W PAR30S E26 930 40D

LED PAR30 S/L

Lifetime

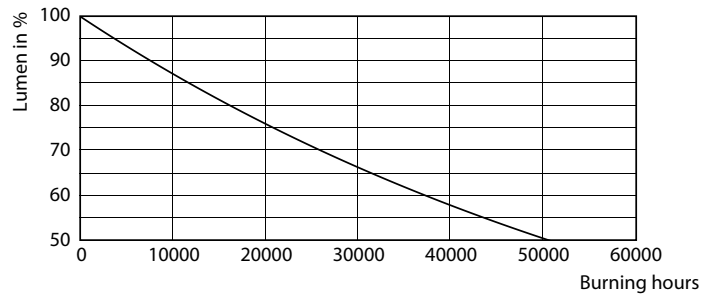

LEDspots LED 25K

LEDspots LMP 25K

