



MSR Gold™ SA Double Ended

MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General information		Initial lumen (Nom)	
Base	SFC-11 [SFC-11]	Initial lumen (Nom)	42000 lm
Operating Position	Universal [Universal]	Chromaticity Coordinate X (Nom)	294
Main Application	Entertainment	Chromaticity Coordinate Y (Nom)	317
Life to 50% Failures (Nom)	750 h	Correlated Color Temperature (Nom)	7500 K
System Description	SA/2 DE	Luminous Efficacy (rated) (Nom)	73 lm/W
		Color Rendering Index (Nom)	75
Light technical		Operating and electrical	
Color Code	2	Power (Rated) (Nom)	575 W
Initial lumen (Min)	39000 lm	Lamp Current (Nom)	7 A

MSR Gold™ SA Double Ended

Ignition Supply Voltage (Min)	198 V
Controls and dimming	
Dimmable	No
Mechanical and housing	
Cap-Base Information	SFC-11
Luminaire design requirements	
Pinch Temperature (Max)	752 °F

Product data	
Order product name	MSR Gold™ 575 SA/2 DE 1CT/40
EAN/UPC - Product	8727900914641
Order code	245019
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	928175105114
Copy Net Weight (Piece)	0.071 lb


Dimensional drawing

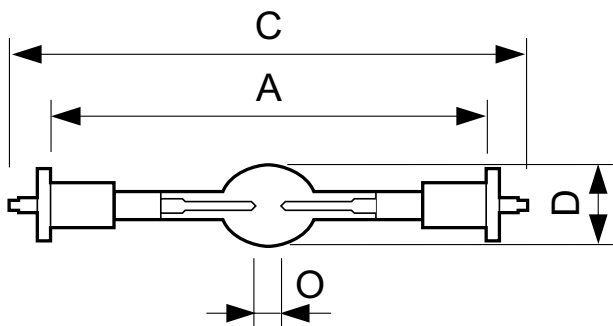


MSR Gold™ 575 SA/2 DE 1CT/40

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 575 SA/2 DE 1CT/40	3/4 in	1/4 in	2-3/4 in	2-13/16 in	2-3/4 in	3-5/8 in

Photometric data

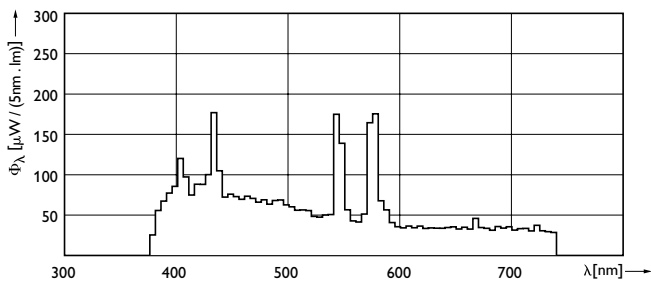

XDPB_XDMSR_575W_SA2-DE-Spectral power distribution B/W

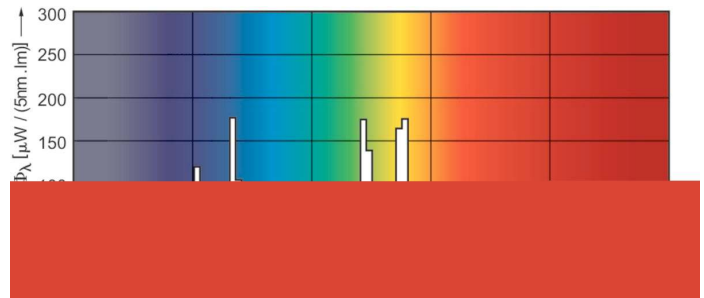

MSR Gold™ SA Double Ended

